3 X 2 LUMIÈRE LIGHT WALL (NO LIGHTS)



PRODUCT CODE: LLW3X2NL





Graphic Endcaps (Optional)

PRODUCT DESCRIPTION

Introducing the Lumiere Light Wall! A combination of innovative silicone-edge graphics and RPL fabric pop ups offers an easier and more cost effective SEG option. This SEG style display has the depth of the RPL so you can expose more of your message using endcap graphics. The Lumiere shrinks down in size - simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabric graphics. Setup can be done by 1 person and in 5-10 minutes. SEG portability is easy and stylish.

GRAPHIC DIMENSIONS 8	88″ W x	59.5″ H
----------------------	---------	---------

GRAPHIC MATERIAL

Stretch Fabric

GRAPHIC FINISHING

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

DISPLAY CONSTRUCTION

Aluminum Frame

SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	20 lbs (frame only) 24 lbs (with graphics)		
Shipping Dimensions	34" L x 14" W x 9" H		
ARGE QUANTITY FREIGHT			

Freight Shipping	15 boxes per 48" L x 40" W x 48" H			
Freight Weight	240 lbs (frame only)			

288 lbs (with graphic	cs)
-----------------------	-----

GRAPHIC TURN AROUND TIME

2 business days after proof approval

AVAILABLE ACCESSORIES

Ready Pop LED Lights (Black & Silver)	RPL LED Lights (Black & Silver)
LED Light Brackets	Stabilized Feet
Straight Link Connector	L Link Connector
AVAILABILITY	CA and PA





skids

Straight Link Connector (Optional)



L Link Connector (Optional)



Frame



Adjustable Feet





Channel Bars on Frame





Bungeed SEG

Channel Bars

PRODUCT CODE: LLW3X2NL



PRODUCT CODE: LLW3X2NL


SET UP INSTRUCTIONS

Set Up Pop Up Frame




a. Place frame with the adjustable feet facing down.

Insert Channel Bars



a. Expand each channel bar. b. Attach channel bars to frame.

- **b.** Expand the frame.



c. Close frame by pushing the outside of the frame until male and female ends connect.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom endcaps on each side of the frame.

Install Graphic

Follow bungee to connect.



a. In each corner, insert the silicone edge beading into the groove.

Optional Accessories

Light Bracket:


a. Snap the LED Light Bracket on top of the frame. Then slide the LED Light onto the bracket.



b. Then insert the remainder of the beading.



c. Repeat graphic installation on the end caps.

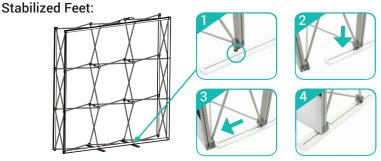

a. From the back, lift frame and insert adjustable feet onto stabilized feet. Then slide stabilized feet toward and insert onto the adjustable feet.