BS
OR-G-HC15-1

panel is notched
on bottom
left

bleed area
trim line

Hercules 15
10' x 20' Truss System
UV Printed



Panel HC15-1 and HC15-4:
Total Graphic Area: 44"w x 84.75"h
Finished Size: 43"w x 83.75"h

Panel HC15-2 and HC15-3:
Total Graphic Area: 48.75"w x 84.75"h
Finished Size: 47.75"w x 83.75"h

Template requires 1/2" bleed around the perimeter

FS = Graphic is front side mounted (3/4" w magnet is applied to the back of the panel)
BS = Graphic is back side mounted (3/4" w velcro is applied to the front of the panel)
Notching = 7/8" square that is cut into the appropriate location.
Hinging= 3/4" strip of material that is cropped from the panel and reapplied with hinge tape. Allows two graphics to share the same extrusion corner.

General Art Guidelines:

- CMYK Color Mode
- All Solid Coated Pantone colors should be called out in the art as spot colors
- Embed all images and support files
- Resolution must be 100-120 ppi
- All fonts must be created to outlines
- Do not scale artboard
- Background color/images must bleed to the edge of artboard
- Do not use spot colors from template in your artwork as they will not print

BS
OR-G-HC15-2

panel is notched
on bottom
right

BS
OR-G-HC15-3

panel is notched
on bottom
left

BS
OR-G-HC15-4

panel is notched
on bottom
right

gray area will
be obstructed
once finished
and mounted

BS

OR-G-HC15-1

panel is notched
on bottom
left

— bleed area
— trim line

Hercules 15
10′ x 20′ Truss System
UV Printed

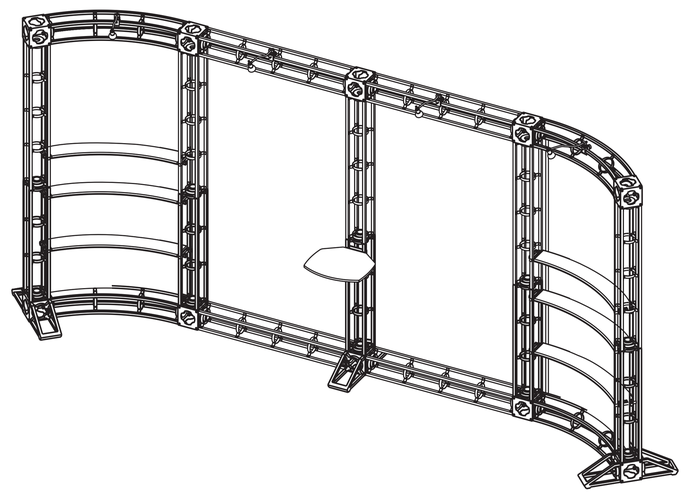

Panel HC15-1 and HC15-4:
Total Graphic Area: 44”w x 84.75”h
Finished Size: 43”w x 83.75”h

Panel HC15-2 and HC15-3:
Total Graphic Area: 48.75”w x 84.75”h
Finished Size: 47.75”w x 83.75”h

Template requires 1/2” bleed around
the perimeter

FS = Graphic is front side mounted
(3/4“ w magnet is applied to the back
of the panel)
BS = Graphic is back side mounted
(3/4“ w velcro is applied to the front
of the panel)
Notching = 7/8” square that is cut into the
appropriate location.
Hinging= 3/4” strip of material that is cropped
from the panel and reapplied with hinge tape.
Allows two graphics to share the same
extrusion corner.

General Art Guidelines:

– CMYK Color Mode
– All Solid Coated Pantone colors should
be called out in the art as spot colors
– Embed all images and support files
– Resolution must be 100-120 ppi
– All fonts must be created to outlines
– Do not scale artboard
– Background color/images must
bleed to the edge of artboard
– Do not use spot colors from template
in your artwork as they will not print

BS

OR-G-HC15-2

**panel is notched
on bottom
right**

BS

OR-G-HC15-3

panel is notched
on bottom
left

BS

OR-G-HC15-4

panel is notched
on bottom
right

gray area will
be obstructed
once finished
and mounted