SEGO CONFIGURATION A - 20X10

PRODUCT CODE: SEGO-A-20x10G





















PRODUCT DESCRIPTION

The advanced technology of the new SEGO modular lightbox system combines innovation with intuition. Toolless down to its feet, SEGO is designed to help heighten your display experience. Magnetic electrical connectors light up the UL certified LED lights that come pre-installed in the profiles. Electrical wires stay hidden from view. Edge-to-edge customizable SEG backlit fabric graphics cover the front and back of the aluminum frame. Portable, configurable, desirable, SEGO is a lightbox unlike the others. SEGO is so well thought out, even its durable foam cut carry bag is made distinctly to keep all parts and pieces protected and organized.

DISPLAY DIMENSIONS	236"W x 88.25"H x 16.5"D
GRAPHIC SIZE	118.625"W x 88.625"H (each graphic)

GRAPHIC MATERIAL

Dye Sub Backlit Fabric

GRAPHIC FINISHING

Silicone beading sewn onto edge of graphic

DISPLAY CONSTRUCTION

Aluminum extrusion frame with plastic components

SHIPPING WEIGHTS & DIMENSIONS

11 3 3	55 lbs (frame only) (per box) 60 lbs (frame & graphic) (per box)

Shipping Dimensions | 54.5"W x 15.5"H x 6.75"D (x4 boxes)

GRAPHIC TURN AROUND TIME

CERTIFICATES UL, CE, GEM VOLTAGE INPUT 100-240V


2 business days after proof approval (up to 2 cofigurations)


AVAILABILITY CA

LED LIGHT SPECIFICATION		LUMENS (EACH FRAME)	
BRAND	Osram	VOLTAGE (V)	24
POWER	3W	POWER (W)	270
CCT (COLOR TEMP)	6800k	LM/W	130
AVERAGE BEAM ANGEL	20 °	TOTAL LM	35100
LM/W	130	AVG LM	5850
AVG LM/M ²	4800-5800	CU	.8
VOLTAGE INPUT	24V	EAV	4680
TRANSFORMER SPECIFICATION			ı
POWER RATE 2	95W, 252W		
TRANSFORMERS			





PARTS LIST








SET UP INSTRUCTIONS SEGO 300X225 FRAME ASSEMBLY

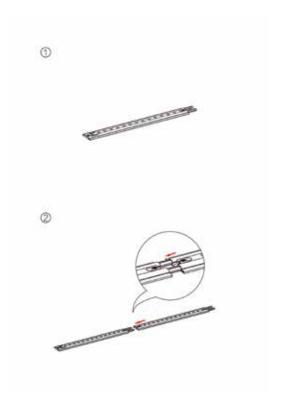


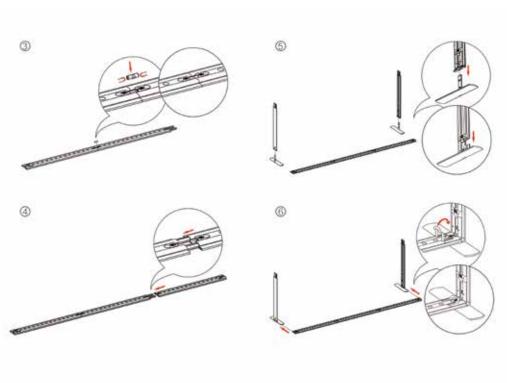


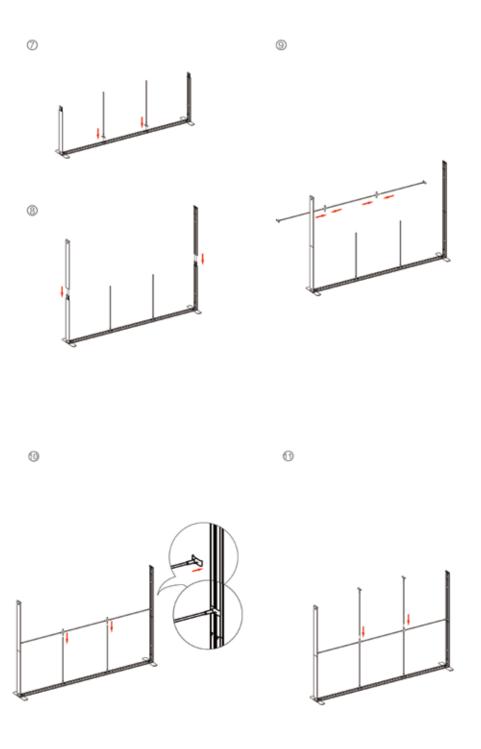

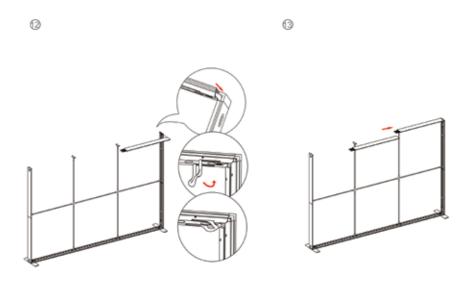

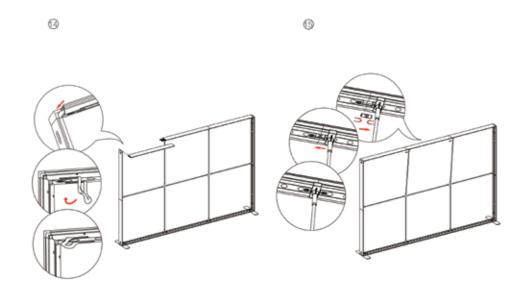

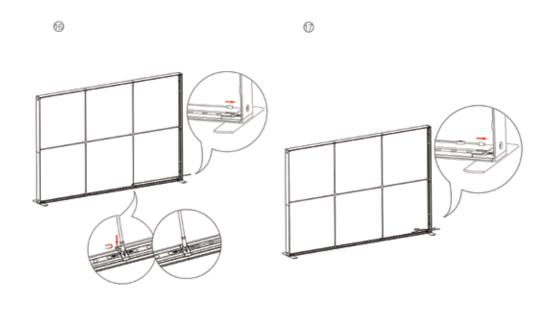

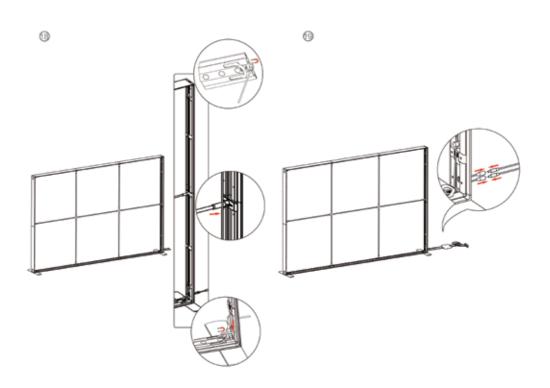

FRAME CONNECTION

