


Value Streamline Sail Sign Universal Assembly Instruction

Products these steps apply to:

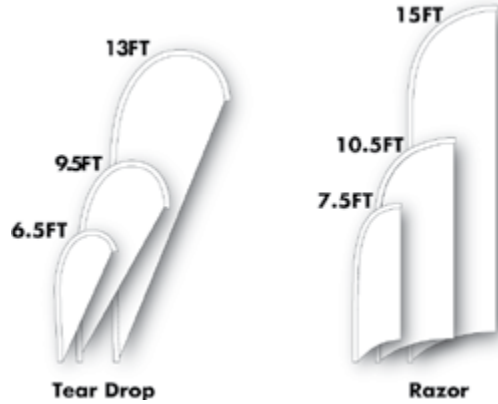

NOTE: Keep product clear from trees, poles, buildings, or any other obstruction as it will cause premature wear.

<p>Product Parts</p> <p>1 - Graphic 2 - Poles (as shown)</p>		<p>2</p> <p>← Bottom Pole ← Middle Pole ← Top Pole</p>
<p>Optional Parts</p> <p>4- Base (options a/b) a. Spike b. Cross Base 5 - Water Ballast (round/square) *kit only includes one ballast</p>		<p>NOTE: 6.5' Teardrop & 7.5' Razor has (2) poles.</p> <p>← Bottom Pole ← Top Pole</p> <p>NOTE: 13' Teardrop and 15' Razor has (4) poles.</p> <p>← Bottom Pole ← Middle Pole ← Middle Pole 2 ← Top Pole</p>

Display Set-Up

Step 1

Begin by removing the parts from the wrap and placing them on a clean flat surface.

Assemble the Poles (2) together by inserting the Bottom Pole into the Middle Pole.



Step 2

Insert the Top Pole into the Middle Pole. **NOTE:** for 13' and/or 15' Sail Signs you will have 2 Middle Poles to insert together before inserting the Top Pole.




Step 3

Carefully insert the top end of the assembled Poles (2) into the pole pocket of the Fabric Graphic (1). Push the Pole (2) as far as it will go until it hits the end of the pole pocket. **DO NOT FORCEFULLY PUSH THE POLE OR IT COULD SNAP.**



Step 4


Pull down the Fabric Graphic on the pole to create the desired shape. Rope the webbing loop over the adjustable pole hook located on the base of the Bottom Pole (2)

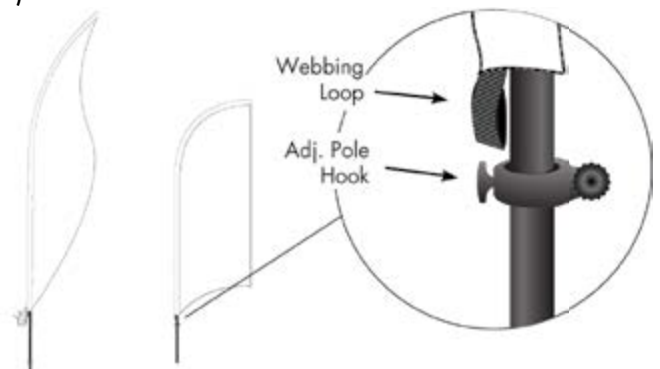

Display Set-Up Continued...


Optional Base Spike 4a

Hammer Spike Base (4a) into the ground at desired location. **DO NOT** hammer the shorter post. Insert Bottom of Pole (2) over stem on Spike Base (4a).

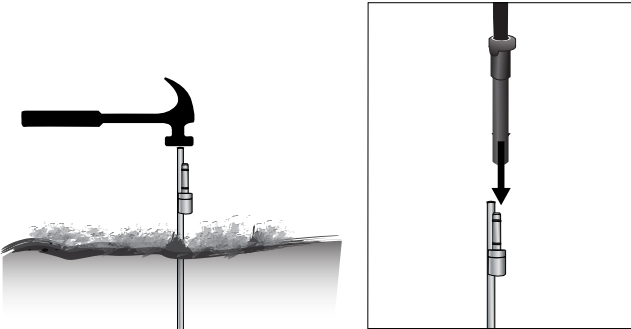

Optional Cross Base 4b


Place Cross Base (4b) at desired location and screw top stem connector in through both base parts into threaded insert. Insert the bottom of the Sail Sign over the Cross Base (4b) stem.

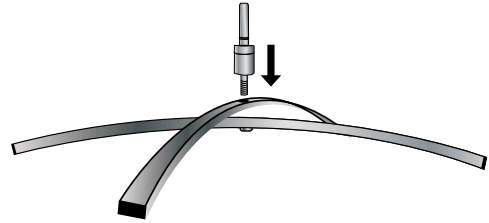

Optional Water Ballast

Place the Water Ballast (5) over the Base (4b) **BEFORE** attaching the Sail Sign. Fill Water Ballast (5) with water for stability.

NOTE: 13' and 15' sail signs will need square water ballasts

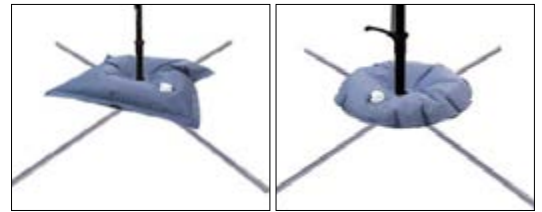

Storage and Care

Wrap all product parts together and store in a cool dry location, away from direct sunlight. To clean, wipe with damp cloth. Do not iron or dry clean the banner.