EZ TUBE CONNECT BACKLIT 10FT CONFIGURATION B

CALLIS EVALUE

114. 5/28

10/1-12/31



On frame On graphic

PRODUCT DESCRIPTION

Let your message shine! EZ Tube Connect modular tube display is now backlit. Included LED ladder lights attach easily and hook into corresponding holes on the top and bottom tubes. At 90" tall, EZ Tube Connect Backlit has multiple frame widths of 3ft, 5ft, and 10ft. Each EZ Tube Connect Backlit frame connects tool-free, with a simple push button snap to lock and to attach to feet. Configure multiple frames as desired. Feet have two mounting points to connect frames side-by-side. Customize a single-sided fabric graphic that pulls over frame and zips closed underneath. Medium Hard Case included.

DISPLAY DIMENSIONS 120"W x 90"H x 18.75"D

GRAPHIC SIZE 61"W x 89.5"H (each frame)

GRAPHIC MATERIAL

Dye Sub Backlit Fabric

GRAPHIC FINISHING

Sewn on left, right and top with zipper on the bottom

DISPLAY CONSTRUCTION

56mm Aluminum Tubing

SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight 66 lbs (each case - 4 cases toal)

Shipping Dimensions 22"W x 39"H x 17"D

LARGE QUANTITY FREIGHT

Freight Shipping 8 boxes per 48"L x 40"W x 43"H skid

Freight Weight 528 lbs (frames & graphics)

RAPHIC TURN AROUND TIME

2 business days after proof approval

AVAILABILITY	Pacific Fulfillment Center

LED LIGHT SPECIFICATION		TRANSFORMER SPECIFICATION	
POWER	9W (per strip)	VOLTAGE INPUT	100-240V
LED QTY PER STRIP	9	VOLTAGE OUTPUT	24V
LED STRIP QTY	21	AMPS	6.25A
AVERAGE BEAM ANGLE	175 °	WORKING TEMP	40°
TOTAL POWER	189W	CERTIFICATES	UL, CE
VOLTAGE INPUT	24V	SPECS ARE PER TRANSFORMER	
SPECS ARE PER LADDER LIGHT			





Single foot connection

Double foot connection







Includes qty 4 Medium Hard Cases Case Inside Dimensions: 20.5"W x 32.5"H x 12"D

Foot Dims 3 1'/8" x 18 3/4" PRODUCT CATEGORY: EZ FABRIC DISPLAYS

PRODUCT CODE: EZCNCT-BL-20KIT-B-5X5X5X5G1



PARTS LIST

PRODUCT CATEGORT. EZ FABRIC DISPLATS PRODUCT CODE: EZCNCT-BL-20KIT-B-5X5X5X5X

TEMPLATE




EZ TUBE CONNECT BACKLIT PRODUCT CATEGORY: EZ FABRIC DISPLAYS INSTRUCTIONS FOR 3ft, 5ft, and 10ft FRAMES

Foot

SETUP INSTRUCTIONS Top Straight Tube Plastic Corner Connector Tube Connection Press button & insert swaged end into receiving end of tubing Vertical Tube <u>O</u>····· O O···· O O···· O LED Light Installation Top Connection Insert hooks into holes along top tube 5ft and 10ft frames have holes in corners to attach 3ft and 8ft frame only attach along top tube Tensioner/Adjuster **T**10 Ť Pull Loop LED Ladder Light T T LED Light Installation Bottom Connection L Connector Insert hooks into holes along bottom tube Bottom Straight Tube Bottom of lights have a pull loop and adjuster to add tension to lights

TRANSFORMER WIRING INSTRUCTIONS

Power wires for transformers are highlighted in red on the renders below. Make to sure to set up the ladder lights accordingly. Feed wiring through the opening for legs on the graphic per renderings.

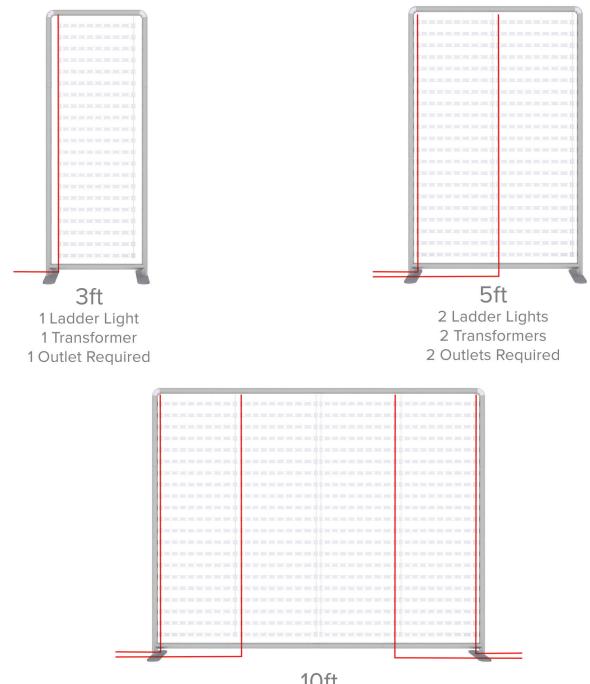

10ft 4 Ladder Lights 4 Transformers 4 Outlets Required