Serpentine Mural

TEMPLATE SET-UP AT 1/2 SCALE

Total Graphic Area: 278.3125"w X 88.5625"h
Template Graphic Area: 139.15625"w X 44.28125"h

Trim Size: 277.3125"w X 87.5625"h
Template Graphic Area: 138.65625"w X 43.78125"h

Front Curved Panel Size: 26.5"w X 87.5625"h
Connector Panel Size: 28.875"w X 87.5625"h
Back Curved Size: 31.8125"w X 87.5625"h
Endcap Panel Size: 23.5"w X 87.5625"h

Template requires 1/4" bleed around the perimeter (1/2" around the perimeter when scaled to 200% and printed)

General Art Guidelines:

– CMYK Color

– Do not embed images, supply them

– Resolution must be 200-240 ppi when set-up at 1/2 scale

– All fonts must be created to outlines



277.3125" width + bleed (full size) / 138.65625" width + bleed (1/2 scale)

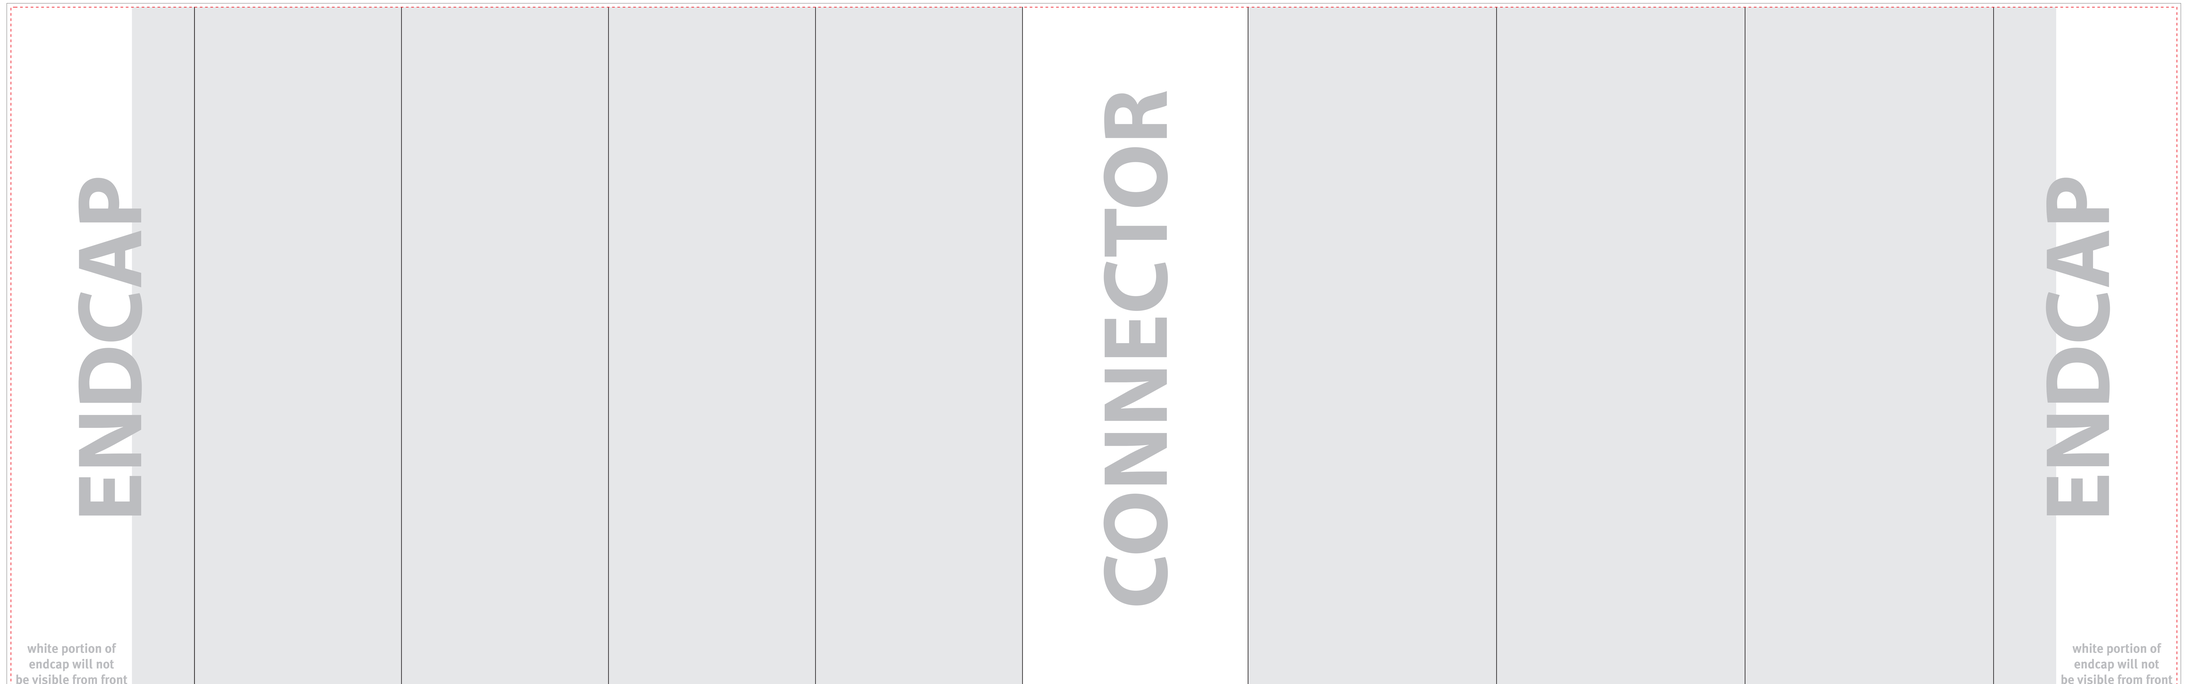

87.5625" height + bleed (full size)
43.78125" height + bleed (1/2 scale)

4x3 Curved Frame: 106" width (full size)
53"width (1/2 scale)

3x3 Rear Curved Frame: 95.4375" width (full size)
47.71875"width (1/2 scale)